



Patent
Attorney's Docket No. 032264-054

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

UTILITY PATENT
APPLICATION TRANSMITTAL LETTER



Box PATENT APPLICATION
Assistant Commissioner for Patents
Washington, D.C. 20231

Sir:

Enclosed for filing is the utility patent application of R. Michael Fay et al. for SOUND CONTROL METHOD.

Also enclosed are:

- ☒ 6 sheet(s) of ☐ formal ☒ informal drawing(s);
- ☐ a claim for foreign priority under 35 U.S.C. §§ 119 and/or 365 is ☐ hereby made to _
filed in _ on _;
- ☐ in the declaration;
- ☐ a certified copy of the priority document;
- ☐ a General Authorization for Petitions for Extensions of Time and Payment of Fees;
- ☐ an Assignment document;
- ☐ an Information Disclosure Statement; and
- ☐ Other: _____.

☒ An ☐ executed ☒ unexecuted declaration of the inventor(s)

☒ also is enclosed ☐ will follow.

☐ Please amend the specification by inserting before the first line the sentence --This application claims priority under 35 U.S.C. §§ 119 and/or 365 to _ filed in _ on _; the entire content of which is hereby incorporated by reference.--

☐ A bibliographic data entry sheet is enclosed.

☐ Small entity status is hereby claimed.

☒ The filing fee has been calculated as follows ☒ and in accordance with the enclosed preliminary amendment:



21839

C L A I M S					
	NO. OF CLAIMS		EXTRA CLAIMS	RATE	FEE
Basic Application Fee					\$710.00 (101)
Total Claims	63	MINUS 20 =	43	× \$18.00 (103) =	774.00
Independent Claims	2	MINUS 3 =	0	× \$80.00 (102) =	0.00
If multiple dependent claims are presented, add \$270.00 (104)					
Total Application Fee					1,484.00
If small entity status is claimed, subtract 50% of Total Application Fee					
Add Assignment Recording Fee \$ if Assignment document is enclosed					
TOTAL APPLICATION FEE DUE					1,484.00

☐ This application is being filed without a filing fee. Issuance of a Notice to File Missing Parts of Application is respectfully requested.

☒ A check in the amount of \$ 1,484.00 is enclosed for the fee due.

☐ Charge \$ _____ to Deposit Account No. 02-4800 for the fee due.

☒ The Commissioner is hereby authorized to charge any appropriate fees under 37 C.F.R. §§ 1.16, 1.17 and 1.21 that may be required by this paper, and to credit any overpayment, to Deposit Account No. 02-4800. This paper is submitted in duplicate.

Please address all correspondence concerning the present application to:

E. Joseph Gess
BURNS, DOANE, SWECKER & MATHIS, L.L.P.
P.O. Box 1404
Alexandria, Virginia 22313-1404.

Respectfully submitted,

BURNS, DOANE, SWECKER & MATHIS, L.L.P.

Date: November 13, 2000

By: E. Joseph Gess
E. Joseph Gess
Registration No. 28,510

P.O. Box 1404
Alexandria, Virginia 22313-1404
(703) 836-6620

U.S. Patent Application

entitled

SOUND CONTROL METHOD

by

R. Michael Fay

Lawrence J. Gelin

Francis J. Babineau, Jr.

Brandon D. Tinianov

Attorney Docket No. 032264-054
Burns, Doane, Swecker & Mathis, L.L.P.
P.O. Box 1404
Alexandria, VA 22313-1404

SOUND CONTROL METHOD

BACKGROUND OF THE INVENTION

Field of the Invention:

The present invention relates generally to enhancing the performance of a project and more particularly to enhancing the acoustical performance of a structure.

Background Information:

Sound is an energy which is generated by a source, transmitted through a medium, and received by a receiver. It is measured by its power pressure level at various frequencies, typically represented by octave and 1/3 octave bands. The magnitude of the sound's power and pressure level for a given bandwidth is measured and expressed in units called decibels (dB). The higher the decibel level, the greater the intensity of the sound being transmitted for the bandwidth being measured.

The human ear is more sensitive to some frequencies than to others. The ear perceives a 1000 Hertz (Hz) tone as louder than a tone at 200 Hz or 4000 Hz, even though all three tones may have the same decibel level. Table 1 relates sound levels to common sound sources.

Table 1: Examples of Sound Sources and Associated Human Response

Source	dB	Sensory Response
Threshold of good hearing	10	Very faint
Whispered conversation at 6 ft.	30	Faint
Conversational speech at 3 ft.	60	Moderate
Computer printout room	80	Loud
Loud rock band	110	Threshold of discomfort
Passenger ramp at jet airliner	120	Threshold of pain
Military jet takeoff at 100 ft.	140	Extreme danger

A person's response to a sound is dependent on changes in sound pressure level, the spectral content and temporal variation of the sound source, and any background noise that may be present. The human ear does not perceive sound changes in direct proportion to the change in decibel levels. For example, to perceive a halving or doubling of loudness, the sound pressure must be changed by about 10 dB. Table 2 demonstrates the relationship between sound power level changes and human perception.

Table 2: Sound Power Level Changes and Human Perception

Sound Power Level Decrease	Perception
0-3 dB	Barely perceivable
4-5 dB	Perceivable and significant
6 dB	Resultant sound level $\frac{3}{4}$ of initial level
7-9 dB	Major perceived reduction
10 dB	Resultant sound level $\frac{1}{2}$ of initial level

The ability of a structural component (e.g., a wall or a door) to block or absorb sound transmission from one room to another is often represented as a single-number rating called Sound Transmission Class (STC), as described by the American Society For Testing and Materials (ASTM). This rating is calculated by measuring in decibels the transmission loss at several frequencies under controlled test conditions and then calculating the single-number rating from a prescribed method. Table 3 provides an indication of the effectiveness of various STC ratings in reducing the speech transmission from one room in a structure to an adjacent room.

Table 3: STC Ratings and Approximate Speech Transmission Reduction

STC	Privacy Afforded
25	Normal speech easily understood
30	Normal speech audible, but unintelligible
35	Loud speech understood
40	Loud speech audible, but unintelligible
45	Loud speech barely audible
50	Shouting barely audible
55	Shouting not audible

When an actual constructed system is concerned, however, where conditions such as humidity and interior volume are not controlled in a laboratory environment, the single-number rating describing the acoustical performance of

such a system can be expressed as a field STC rating (FSTC), which approximates a STC rating. The higher the FSTC rating of a constructed system, the greater the transmission loss.

5 In building modern residential structures, such as single-family houses, an important factor to consider is noise control. In order to provide a livable and quiet environment, sounds created by sources such as televisions or conversation must be controlled and reduced to comfortable decibel levels. In the case of commercial structures, such as offices and hotels, builders often have available to them complete acoustical performance packages which have resulted from years of experience and testing. Such packages are able to achieve high and consistent FSTC ratings, largely because the structures involved are usually of such typical geometry and configuration as to allow for the successful re-application of tried- and-true methods from one building to the next. However, for builders of residential structures, which can vary considerably in layout, such proven, complete, and economical system packages are not available.

10 In addition, materials used in commercial construction generally provide higher sound transmission loss levels than those used in residential construction. With the use of such elements as concrete floors, floors with gypcrete toppings, and resilient steel studs in wall assemblies, sound transmission loss is not compromised by any one floor or wall assembly. Also, with the specification of

such components as acoustical doors (e.g., for private conference rooms), opportunities are few where a high-performing component is installed with a low-performing component. In contrast, materials and components used in typical residential construction result in systems made up of components performing at equally low transmission loss levels. Because of this, the acoustical performance levels of all of the components (e.g., floors, walls, and doors) have to be improved to an approximately equal level in order to achieve a substantial acoustical benefit.

Currently, two main options are available to builders for achieving some amount of noise control in residential structures. One method involves an acoustical upgrade by an insulation subcontractor or another type of subcontractor. Production builders, i.e., non-custom builders, may offer home buyers an acoustical insulation upgrade as one of the options associated with constructing a single-family structure. Such an upgrade is normally installed by an insulation subcontractor concurrently with the required thermal insulation. Some acoustical upgrades involve a simple solution applied to an entire structure, but most apply to limited areas of a house, such as bedrooms, laundry rooms, or bathrooms. Acoustical upgrades are also sometimes offered in packages of varying price, each commensurate with the amount of work to be performed. For example, a "good" option may only include fiber glass sound control insulation in interior walls and some floors. A "better" option could further include the caulking of gaps and

perimeter joints in walls, which are normally left untreated. For a "best" option, an insulation contractor in conjunction with the drywall contractor may also install resilient channels between the studs and the drywall, or joists and a gypsum ceiling.

5 The above scenario results in a residential structure that has slightly improved acoustical isolation between rooms. The performance improvement could be described in terms of A-weighted sound pressure level (dBA), and an expected improvement using the described method might be 1-10 dBA, depending on what components are measured and where. Although some home buyers may perceive that the rooms within their house have been "sound deadened," the current good/better/best package upgrades do not actually provide significant measurable benefits.

10 The reason for this is because all of the rooms still contain several acoustical weak links or acoustical short circuits that the currently offered acoustical upgrades do not address. As mentioned above, the performance levels of all the components used in building a residential structure have to be improved to an approximately equal performance level in order to achieve a substantial acoustical benefit. Current upgrades, in contrast, only address segments of a system, such as doors or walls, as opposed to an entire system (i.e., a combination of segments). In room-to-room acoustics, one can only achieve a FSTC rating

15

20

slightly better than the performance of the weakest link; sound follows the path of least resistance. For example, a wall built with resilient channels and fiber glass batts may provide an STC of 42 (in a controlled environment), but if that wall contains a typical solid core or hollow core interior door with a STC of 20, then the wall plus door will only yield an overall STC of around 21-24. Similar weak links occur with electrical outlets, background noise, HVAC ducts, structural flanking, and plumbing. Flanking paths (i.e., sound leakage) can be present even when the surrounding construction is of good quality. Direct HVAC ductwork and direct electrical outlet positioning between rooms and corridors also create escape routes for sound (i.e., cross-talk).

The other method for enhancing acoustical performance in a residential structure involves an acoustical expert, whom a custom builder relies on for advice. An acoustical expert will typically review the building plans and systematically inspect areas of house, detecting most of the weak links and addressing them using textbook principles and previous experience. In many cases, acoustical experts are able to correct many of the weak links, but academic principles usually fail to factor in the interactions of the "real world," e.g., location and type of framing members, short circuits, leaks, etc. Complete acoustical enhancement systems that are both practical and economical are not contained within reference texts. Therefore, an acoustical expert would likely

overdesign some of the necessary acoustical components and overcome other obstacles with extra mass and expensive solutions.

Presently, no complete, practical, and economical acoustics package system, balancing solutions to all possible weak links, is available for the production and semi-custom home segments.

SUMMARY OF THE INVENTION

Accordingly, the present invention is directed to a system that allows a builder to substantially enhance the acoustical performance of a structure in a practical and economical manner.

According to a first embodiment of the present invention, a method is provided for enhancing performance of a project, including the steps of inputting project information, including a desired performance level, and selecting enhancement solutions based on the project information.

According to a second embodiment of the present invention, a system is provided for enhancing performance of a project, whereby the system comprises a central computer for receiving project information, a control center containing a plurality of enhancement solutions, and a reviewer for determining a combination of enhancement solutions based on the received project information.

BRIEF DESCRIPTION OF THE DRAWINGS

Other objects and advantages of the present invention will become more apparent from the following detailed description of preferred embodiments, when read in conjunction with the accompanying drawings wherein like elements have been represented by like reference numerals and wherein:

Fig. 1 is a flow chart illustrating one method of enhancing acoustical performance in a residential structure according to the present invention;

Fig. 2 is a schematic diagram of a residential sound control system according to the present invention; and

Figs. 3-7 illustrate various levels of sound control performance between two rooms in a residential structure.

DETAILED DESCRIPTION OF THE INVENTION

In a typical home, one without any additional sound control components, the sound isolation between rooms of the home is minimal. The architectural components that prevent sound transmission between rooms, e.g., walls, floors, and doors, may 1) perform poorly on an individual basis, 2) have compromised performance due to leaks, penetrating items such as HVAC ducts, or poor construction details, or 3) perform poorly as a complete system due to structural

flanking. In order for the built environment of a home to achieve a high level of sound isolation between rooms, each architectural or mechanical path for noise transmission between rooms must be addressed to a high and similar or nearly equal degree. This is manifested in two cases, where in the first case sound traveling from a source to a receiver through multiple paths is addressed to an equal performance level along each path. In the second case, a room that could receive noise from multiple sources has the paths from each source treated to an equal performance level.

The importance of treating each architectural or mechanical path for noise transmission is demonstrated in Figs. 3-7, where a room with a source of noise is adjacent to a room where the occupant desires quiet (e.g., for reading, sleeping, studying, or relaxing). In Fig. 3, 80 dB of sound from room A of a typical house travels by way of multiple paths (e.g, through the walls, floor, door, etc.) to room B, where an occupant is bothered by the 53 dB of transmitted sound. The addition of a noise abatement material such as fiber glass insulation or a sound control board into the wall path 21, shown in Fig. 4, offers an component-level drop of 2 dB to 3 dB, but has virtually no effect on the overall sound transmission. The addition of sound control material into the underfloor path 22, shown in Fig. 5, also has only a minimal overall effect, even though the floor as a path may experience an 8 dB benefit. In Fig. 6, caulk is introduced around the floor

perimeter 23 to reduce sound leaks and duct liner is added to the duct 24 to reduce cross-talk. However, these changes, even in conjunction with the sound blockage of the wall and underfloor paths, only results in around a 3 dB improvement over the unmodified room system.

5 The reason for this is because weak links still exist between room A and room B and allow significant sound leakage between them. As described above, such weak links are normally either ignored (e.g., in the "typical" builder case) or addressed with expensive overdesigns (e.g., in the custom builder and acoustic expert case). In addition to those listed above, weak links may also include
10 penetrating items, such as electrical conduit, junction boxes or electrical receptacles, HVAC ducts, water or gas pipes, drain pipes, vents or registers, or any other items which penetrate a wall or floor-ceiling assembly. Weak links may also include construction discontinuities (air leaks, holes, or joint discontinuities), sound transmission or vibration through structural components (e.g., framing
15 members, building boards, or fasteners), and cross-talk through air ducts. In Fig. 7, the weak link, in this case a door path 25, is addressed with a tested component solution and the overall benefit is substantial (i.e., 42 dB drop), compared to the untreated system.

20 The process of the present invention begins with a builder desiring to achieve a certain level of sound control performance in the structure, preferably

the type of room-to-room performance illustrated in Fig. 7. The desired level of performance could be represented by a room-to-room FSTC rating, based on the overall performance of all of the components acting as a whole, in the manner that the entire system would perform in a field test. The builder may be one who constructs conventional, tract housing for others, or an individual planning to build a custom house or perform retrofitting work on an existing house. The project or structure itself may already be constructed (e.g., and may require additional work, such as a remodel or an addition), or it may exist only as an architectural drawing. Regardless, during the input condition of Fig. 1, the builder forwards the project information to either a main facility 11 or a sound control center 12 of Fig. 2, where in either location a design department (not shown) receives the information. The main facility 11 may be, for example, a manufacturer of sound control materials (e.g., fiber glass products) with branches dispersed in various locations. The sound control center 12 is an entity that receives product and testing information from the main facility 11 and associated subcontractor partners 15-18. The subcontractor partners may, for example, be door, caulk, or plumbing subcontractors, or may be the manufacturers of these products. The sound control center 12 acts as a type of subcontractor or coordinator during subsequent steps of the sound control process.

Information supplied to the design department may contain building plans, specifications, material lists, or any other information related to the structure, including the desired level of acoustical performance upgrade. Building plans may include the general layout of such components as walls, doors, and ducts, and may also include detailed drawings of floor assemblies, including mechanicals. The forwarded information may further include information related to the planned usages of the rooms within the house (e.g., bedroom, exercise room, etc.) and also any space or code restrictions that may preclude any proposed modifications.

The inputting step 1 may be performed by the physical forwarding of documents from a builder to a design department or may involve the electronic transmission of project information from, for example, a remote computer (located at the home builder 13 or the occupant 14) to a central computer (not shown) located at either main facility 11 or sound control center 12. This latter type of transaction may be performed over the Internet (or other remote communications system) and may require all forwarded project information to be of a format compatible with software used in the central computer.

The reviewing step 2 occurs at the design department and entails the reviewing and analysis of received project information and the modification of building plans. During this process, wall and floor-ceiling information included in the project information are reviewed in accordance with the desired performance

level of the system. Based on the review, the most practical sound control component solutions are selected to achieve the chosen performance level, and the building plans are modified accordingly to reflect the inclusion of the new components. The upgrade may involve adding to the structure additional material, such as board products, blanket products, and insulation products, or may require the relocation or reconfiguration of existing components, such as directly aligned HVAC ducts or electrical outlets, to create acoustical breaks across the structure. Preferably, the components would be available either from the main facility 11 or any number of subcontractor partners 15-18 working in conjunction with the sound control center 12.

In order to modify building plans with a high confidence level of the final FSTC performance, extensive component and system testing is required. In particular, obtaining such confidence in a final system performance requires that the interaction (e.g., effect on FSTC rating) of every component solution with other component solutions be thoroughly understood through prior testing. Preferably, main facility 11 contains an acoustical laboratory 21, which performs all the required testing in order to maintain data integrity. Testing may also be supplemented or substituted by the use of modeling software, which may be capable of modeling both structural systems and sound sources. Unlike conventional residential sound control methods, the present invention applies

tested component and system solutions to every acoustic weak link in the building plan or subsets (i.e., rooms) of the building plan. Such solutions may, for example, be recorded in electronic form and stored in a database located in main facility 11 or sound control center 12. Because all possible solutions and their combinations have been tested to produce a given result (i.e., within a FSTC rating range), predictability of a final system performance is high. Such accuracy and economical efficiency is not possible when using off-the-shelf components and generalized, theoretical principles.

Experimentally-verified solutions involve the use of a wide variety of components, materials, and structural modifications. For example, sound control components can be installed in wall, floor, and ceiling assemblies. Such components can include fiber glass insulation, sound control boards, resilient channels, resilient floor underlayments or toppings, metal studs (or staggered wood studs), resilient studs, and various types of gypsum wallboard. Door solutions may involve the installation of solid core or specially-designed acoustical interior doors with perimeter gaskets and floor seals/sweeps/thresholds. Noise flanking paths between adjacent rooms can be reduced or eliminated by the use of airborne treatments (e.g., barriers or fiber glass insulation) and structural treatments (e.g., isolation pads, structural joist breaks, or sound control boards). Noise transmitted through pipes and air ducts can be reduced by installing liners,

foam wraps or pads, and sound control boards. Also, offsetting the positions of penetrations and ducts can eliminate cross-talk between adjacent rooms.

As described above, the solutions are selected based on room-to-room FSTC performance levels specified by a home builder 13 or occupant 14. For example, if the chosen FSTC rating is 40, then all of the components that drive room-to-room acoustic performance are selected based on the most economical and practical solution that yields close to or better than a performance level of FSTC 40 as a system. This balanced approach ensures that none of the components are over-designed and thereby the upgrades provide a maximum benefit for minimum cost.

The reviewing step 2 may be performed by human designers or by a computer. In the latter case, building plans may be scanned and electronically forwarded (e.g., through the Internet) to the design department, where a reviewing computer thoroughly examines the plans, selects a solution or a combination of solutions from a database, and directly modifies the plans.

At the presenting step 3, solutions selected during the reviewing step 2 are presented to the builder 13 from sound control center 12. This presentation preferably includes modified building plans, a bill of materials, and detailed drawings or videos demonstrating how recommended components are to be

installed. This information may be either in the form of physical items or may be electronically transmitted through the Internet to a remote computer at the builder location 13.

5 The received bill of materials informs the builder of the amount and cost for each component associated with the upgrade. Material information, including associated cost, is stored in the sound control center 12 and is preferably updated periodically by main facility 11 and partners 15-18. Preferably, the updates would be electronically filed occur through the Internet, or similar system, from remote computers. Alternatively, the sound control center 12 may provide hyperlinks
10 through the Internet to databases or websites providing material and supplier information.

Installation step 4 involves performing upgrade work based on the solutions presented to the builder. This work may be necessarily performed by sub-
contractors and their workers or may be performed by the builder. However,
15 while the scheduling of the work is up to the builder and dependent upon an established construction schedule (e.g., framing, thermal insulation, drywall, etc.), the sound control center 12 may provide other services in a subcontractor mode. As the installation of sound control components necessarily involves the cooperation of several other construction trades, it is helpful for the sound control

center 12 to be able to offer inspection services to assure that upgrade components are correctly installed.

Such inspection services are performed at inspecting and measuring step 5 and may, for example, include checking by crews for correct installation and measuring the performance using acoustical test equipment on-site. Inspection services may also include the use of on-site cameras or live-conferencing technology (e.g., through the Internet). In addition, the sound control center 12 may provide work crews of trained installers and inspectors.

The sound control center 12 can also offer to the builder a performance guarantee for the upgrade. For example, if a builder selects an acoustics package system of FSTC 40, then the sound control center 12 could certify that a performance level of FSTC 40 will be achieved if all the determined component solutions by the design department are followed exactly and installed correctly. Sound control center 12 may offer post-construction acoustical testing to determine if the desired level of acoustical performance is reached.

In addition, sound control center 12 is able to compile post-installation information (e.g., from acoustical testing) from each upgrade project and apply it to future upgrade projects. In other words, a design department informed of the actual results of the upgrades will be able to adjust any their testing or analysis

methods to improve the reliability of reviewing step 2. In this way, the entire system becomes more efficient and effective with each complete cycle of modifying a set of building plans to measuring the end room-to-room performance.

Sound control center 12 may also provide demonstrations and show homes to potential clients. Individuals interested in receiving information about the a home acoustical performance upgrade may be able to contact the sound control center 12, preferably from remote computers through the Internet, and explore upgrade options and their associated costs.

In this way, the present invention provides a system of unprecedented economical efficiency for a residential home builder in that it is able to apply thoroughly tested component solutions and system solutions to a structure to achieve a high acoustical performance rating at a minimal cost. For example, because of the accuracy of the reviewing process in eliminating weak links, use of the present invention can result in consistent performance levels of system FSTC 40 or better. In contrast, conventional sound control methods only offer up to around levels of system FSTC 25.

It will be appreciated by those skilled in the art that the present invention can be embodied in other specific forms without departing from the spirit or essential characteristics thereof. The presently disclosed embodiments are

therefore considered in all respects to be illustrative and not restricted. The scope of the invention is indicated by the appended claims rather than the foregoing description and all changes that come within the meaning and range and equivalence thereof are intended to be embraced therein.

What Is Claimed Is:

1. A method for enhancing performance of a project, comprising the steps of:

inputting project information, including a desired performance level; and

selecting enhancement solutions based on the project information.

5 2. The method of claim 1, wherein the project information comprises building plans for a structure.

3. The method of claim 2, wherein the project information comprises information on the uses of rooms within the structure.

10 4. The method of claim 2, wherein the project information comprises information on interior structural elements.

5. The method of claim 1, wherein project information comprises information on areas within a structure, and wherein the desired performance level is a performance of noise reduction between the areas.

6. The method of claim 1, wherein the enhancement solutions are selected from a plurality of enhancement solutions stored in a sound control center.

7. The method of claim 6, wherein each enhancement solution is combinable with another enhancement solution to form a combination of enhancement solutions.

8. The method of claim 7, wherein a system performance rating is associated with each combination of enhancement solutions, and wherein each system performance rating is stored in the sound control center.

9. The method of claim 8, wherein each system performance rating is a field sound transmission class rating.

10. The method of claim 8, wherein the step of selecting further comprises the step of choosing a combination of enhancement solutions with a system performance rating equal to or greater than the desired performance level.

11. The method of claim 10, wherein a cost is associated with each combination of enhancement solutions and wherein the combination of enhancement solutions is also chosen based on cost.

12. The method of claim 2, wherein the step of selecting further comprises the step of reviewing the project information to determine improvement areas.

13. The method of claim 12, wherein the enhancement solutions are selected based upon the determined improvement areas.

14. The method of claim 13, wherein the determined improvement areas include acoustical weak links.

15. The method of claim 14, wherein the weak links include penetrating items, construction discontinuities, sound transmission through structural components, and cross-talk through ducts.

16. The method of claim 13, wherein at least one of the enhancement solutions involves the addition of a sound control component.

17. The method of claim 16, wherein the sound control component is a sound control material installed in a wall, floor, or ceiling assembly.

18. The method of claim 16, wherein the sound control component is a material for sealing wall, floor, and ceiling perimeters.

19. The method of claim 16, wherein the sound control component is an acoustically enhanced door.

20. The method of claim 13, where at least one of the enhancement solutions involves the indirect positioning of interior components.

21. The method of claim 20, wherein the interior components comprise electrical outlets, air ducts, and fluid-filled pipes.

22. The method of claim 13, wherein at least one of the enhancement solutions involves the discontinuous construction of structural elements of the project.

23. The method of claim 22, wherein the at least one enhancement solution comprises the staggering of wall studs.

24. The method of claim 22, wherein the at least one enhancement solution comprises the addition of a cut line in a floor or floor elements.

25. The method of claim 1, further comprising the step of modifying the inputted project information to incorporate the enhancement solutions.

26. The method of claim 25, wherein the modified inputted information describes a project operating at the desired performance level.

27. The method of claim 25, further comprising the step of presenting the modified project information to a user.

28. The method of claim 27, wherein the modified project information is transferred from the sound control center to a remote computer.

29. The method of claim 25, wherein the modified project information includes a bill of materials.

5 30. The method of claim 29, wherein the bill of materials includes cost information.

31. The method of claim 30, wherein the modified project information includes of a list of tasks based on the selected enhancement solutions.

32. A system for enhancing performance of a project, the system comprising:

10 a central computer for receiving project information;

a control center containing a plurality of enhancement solutions; and

a reviewer for determining a combination of enhancement solutions based on the received project information.

33. The system of claim 32, wherein each enhancement solution is combinable with at least one other enhancement solution to form a combination of enhancement solutions.

34. The system of claim 32, wherein the central computer is located in a design department.

35. The system of claim 34, wherein the design department is located in the control center.

36. The system of claim 34, wherein the design department is located in a main facility.

37. The system of claim 32, wherein the reviewer is located in the control center.

38. The system of claim 37, wherein the reviewer is a human team of acoustical designers.

39. The system of claim 37, wherein the reviewer is a reviewing computer.

40. The system of claim 32, wherein the project information is transmitted to the central computer through a network from a user computer.

41. The system of claim 32, wherein the project information comprises building plans for a residential structure.

42. The system of claim 41, wherein the building plans comprise information on interior structural elements.

43. The system of claim 41, wherein the project information comprises information on the uses of rooms with the residential structure.

44. The system of claim 32, wherein the project information comprises a desired performance level.

45. The system of claim 33, wherein a system performance rating is associated with each combination of enhancement solutions.

5 46. The system of claim 45, wherein an acoustical laboratory located in the main facility determines each system performance rating.

47. The system of claim 45, wherein each system performance rating is a field sound transmission class rating.

10 48. The system of claim 45, wherein the review determines a combination of enhancement solutions based on its associated system performance rating.

49. The system of claim 32, wherein at least one of the plurality of enhancement solutions comprises material information.

50. The system of claim 49, wherein material information comprises information on a sound absorbing material.

51. The system of claim 49, wherein material information comprises information on a sound blocking material.

52. The system of claim 32, wherein at least one of the plurality of enhancement options comprises structural relocation information.

53. The system of claim 52, wherein structural relocation information contains information on indirectly positioning interior components.

54. The system of claim 33, wherein each of the combination of enhancement solutions comprises cost information.

55. The system of claim 54, wherein the reviewer determines a combination of enhancement solutions based on cost information.

56. The system of claim 32, further comprising partner computers, wherein each partner computer is remotely located from the sound control center and transmits updated material and cost information to the sound control center.

5 57. The system of claim 32, wherein the project information is modified to incorporate the determined enhancement solutions.

58. The system of claim 40, wherein the modified project information is presented at a user computer.

59. The system of claim 58, wherein the modified project information includes a bill of materials and component installation instructions.

10 60. The method of claim 8, wherein each system performance rating is verified by experimentation.

61. The method of claim 11, wherein each cost includes information related to materials cost and labor cost.

62. The method of claim 14, wherein the weak links include components having component performance ratings less than the desired performance level.

5 63. The method of claim 5, wherein the desired performance level is a field system sound transmission rating.

ABSTRACT

A system for acoustical performance enhancement, where combinations of component solutions are tested or modeled and given performance ratings. A builder desiring an sound control upgrade forwards project information, such as building plans and the desired performance level, to a design department. The project information is reviewed and a combination of component solutions is determined to increase the performance level of the home to the desired level. The project information is then modified according to the selected combination and presented to the builder. Because the combination of component solutions has been tested and addresses all possible acoustical weak links in the project, confidence of obtaining the final desired performance level in the project is high.

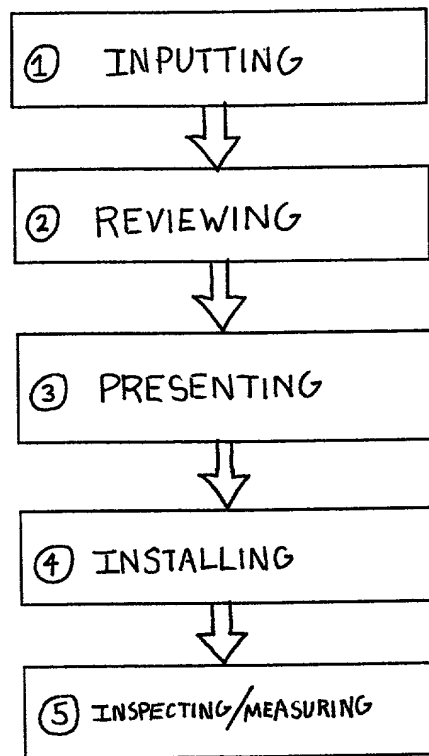


FIG. 1

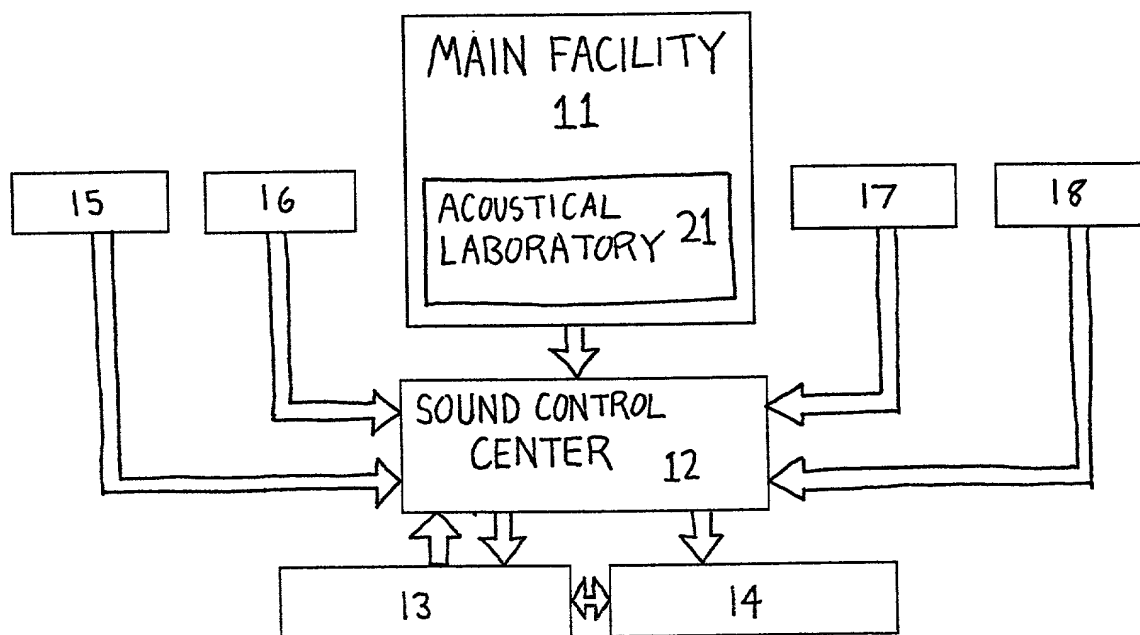


FIG. 2

FIG. 3

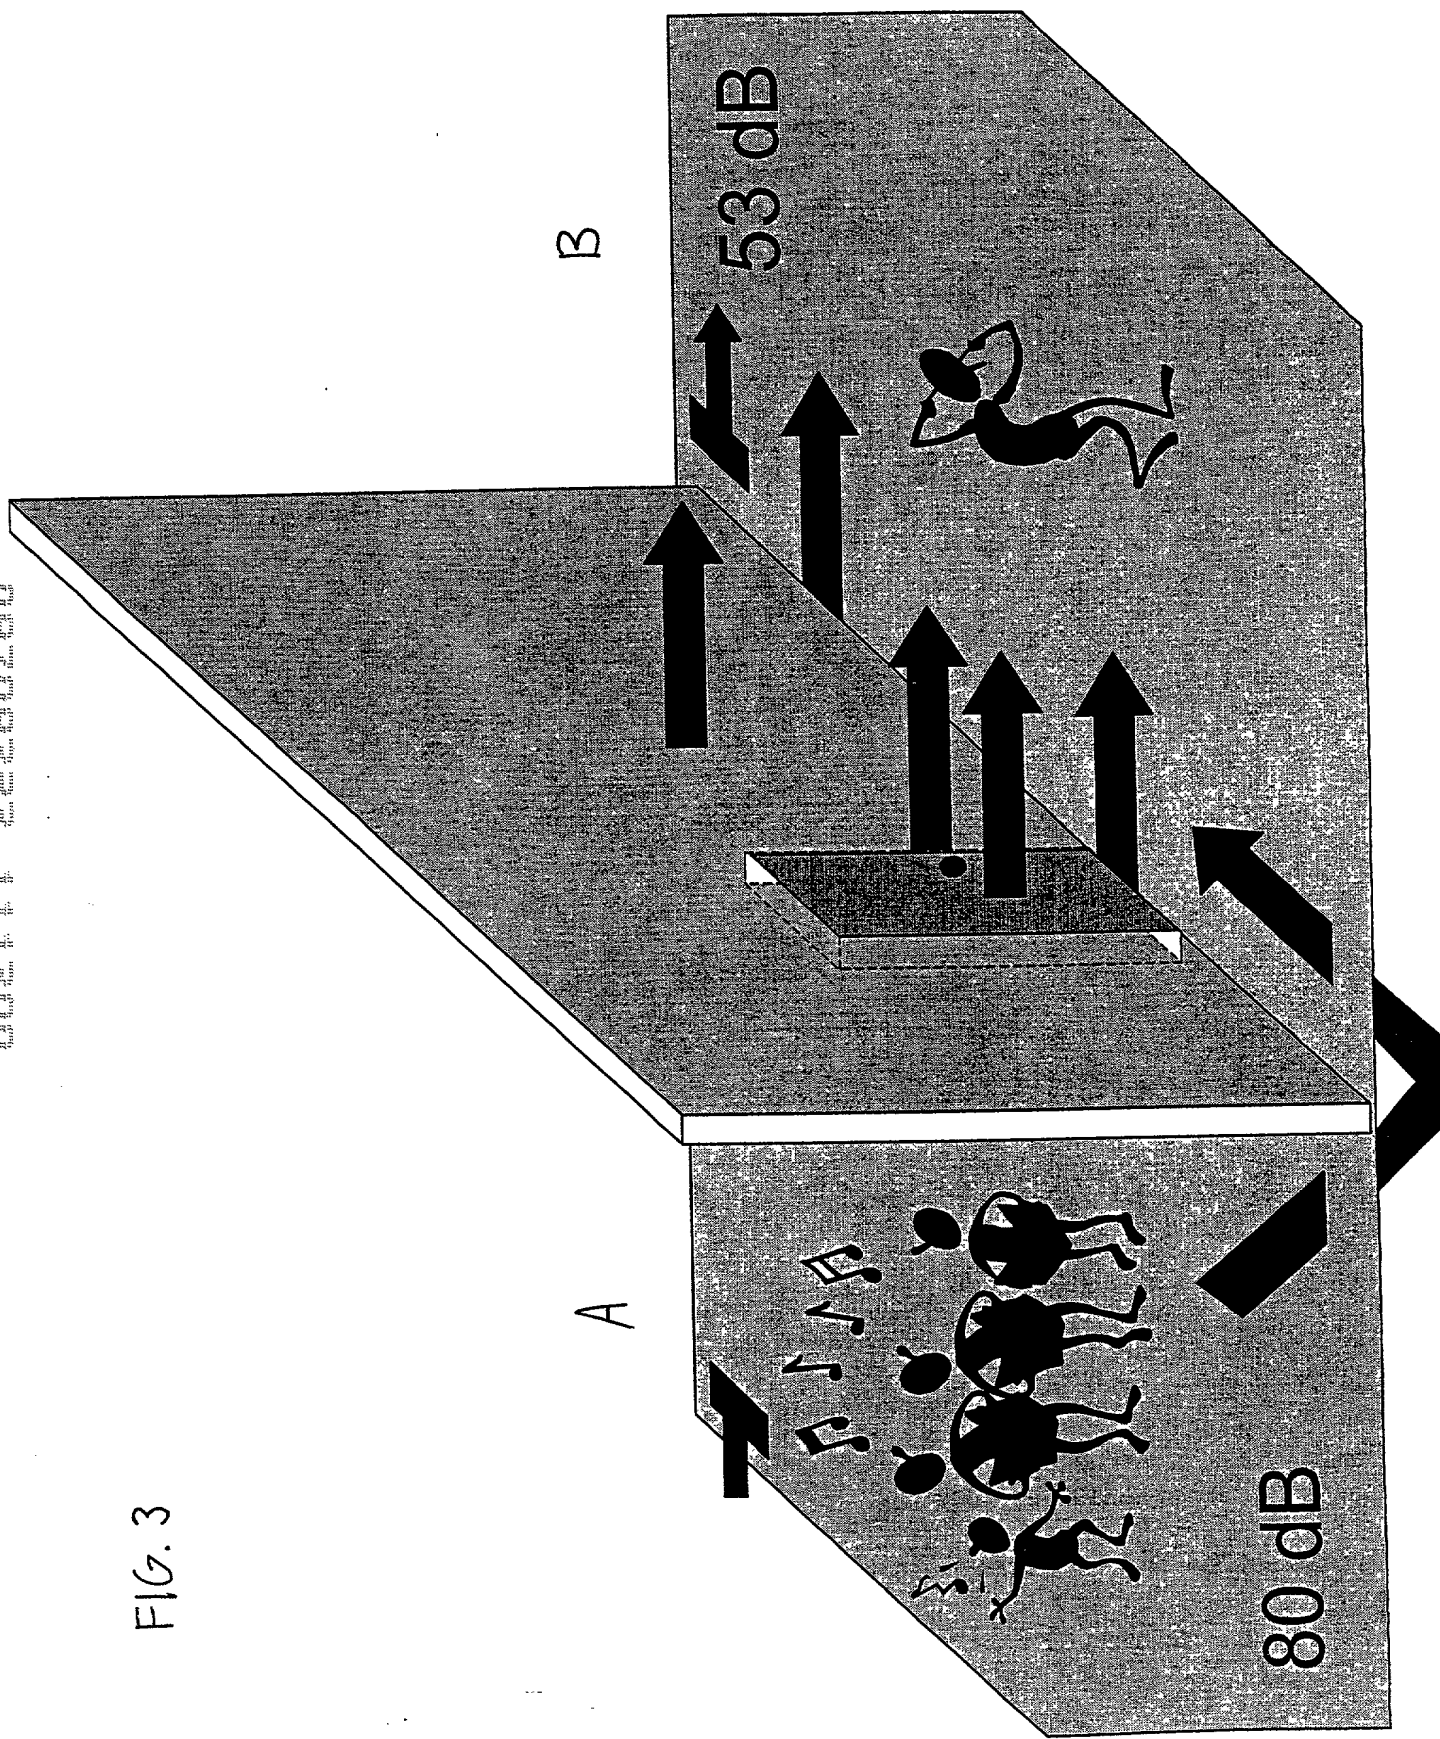
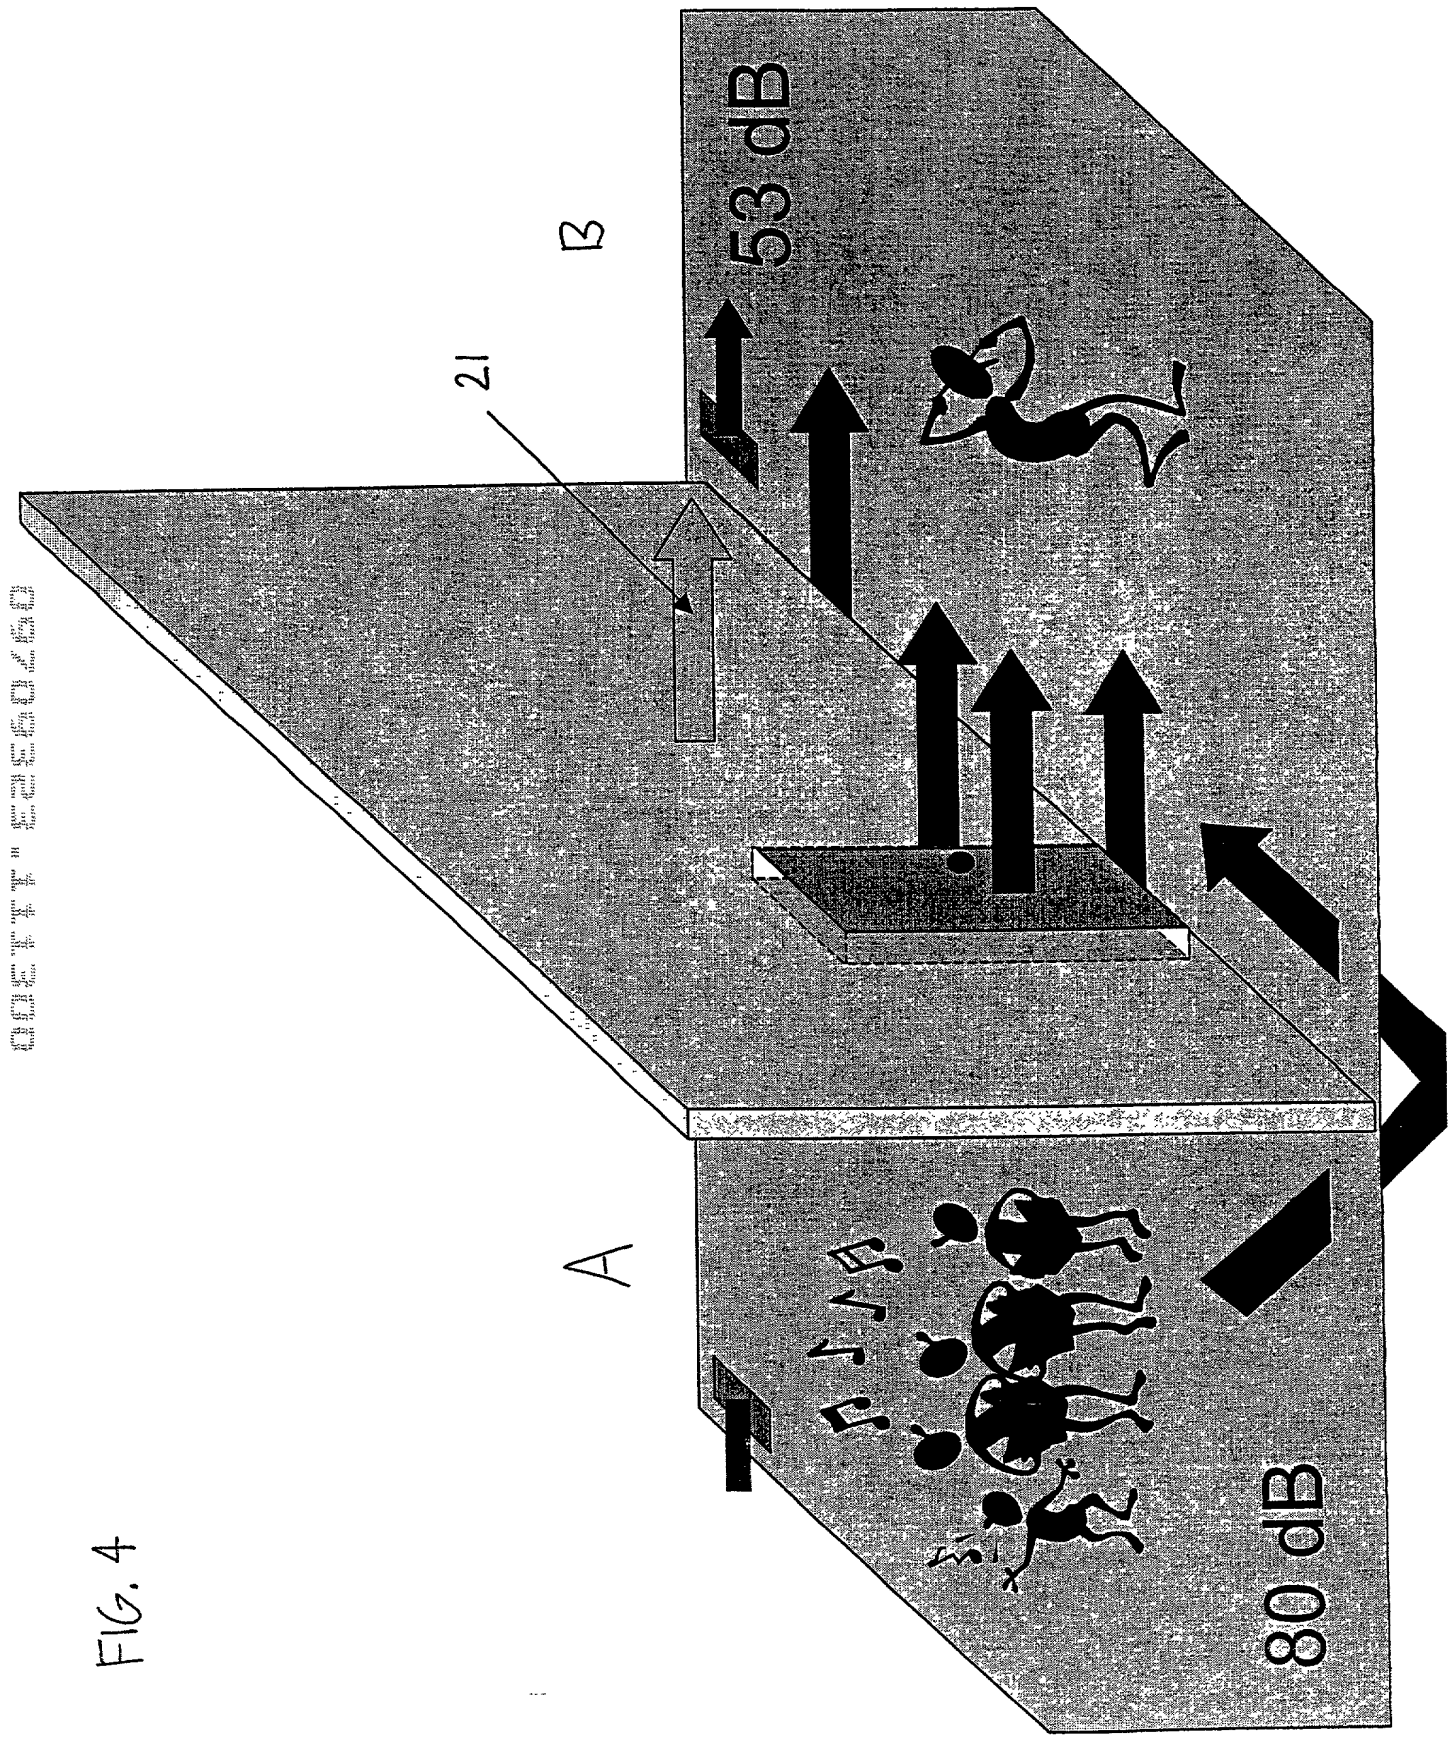


FIG. 4



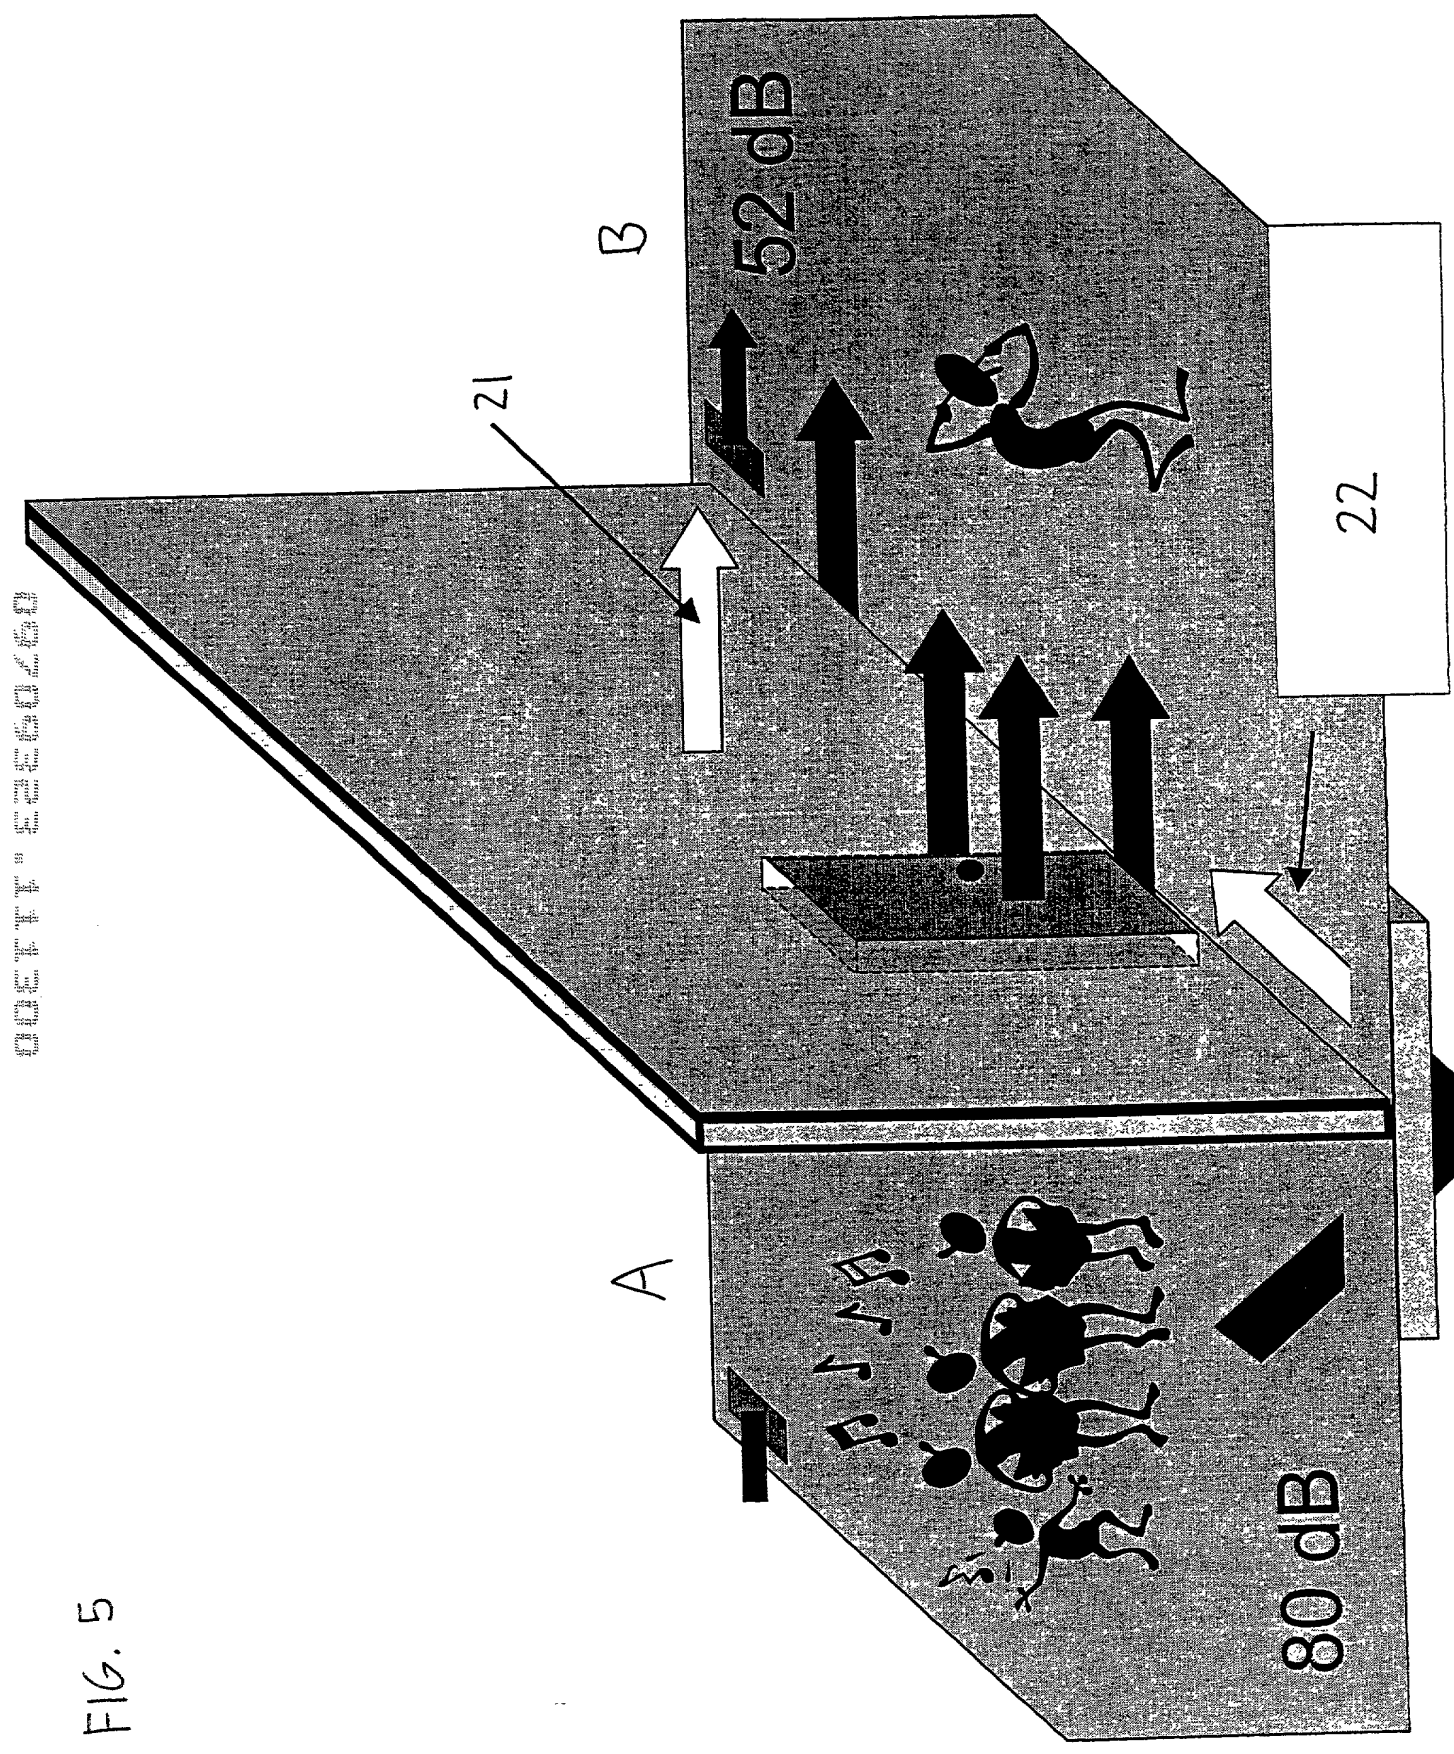


FIG. 5

OFFICE 5250/60

FIG. 6


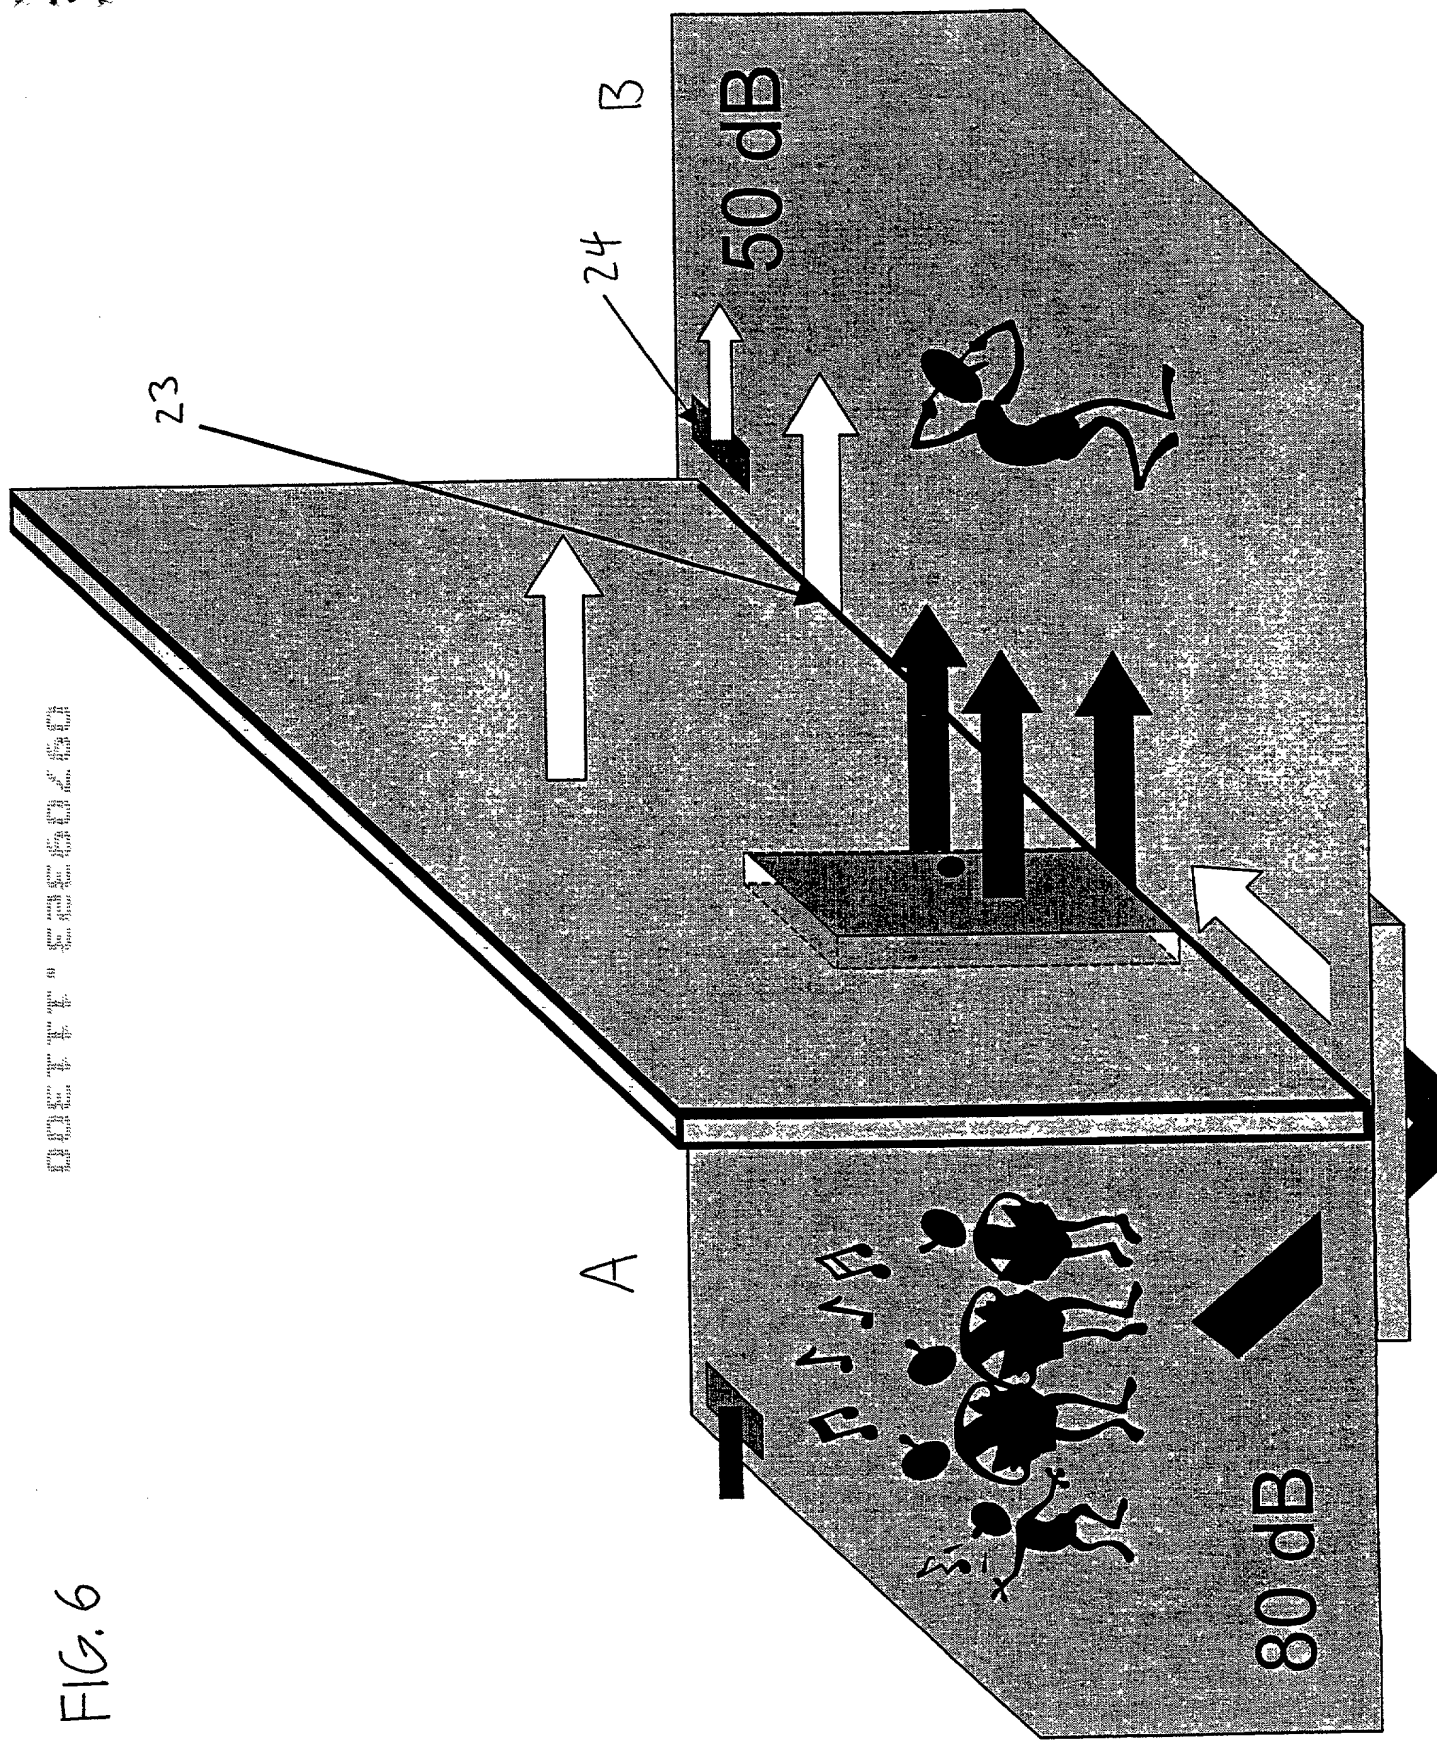


FIG. 7

DOE T F " E 2 5 6 0 / 6 8

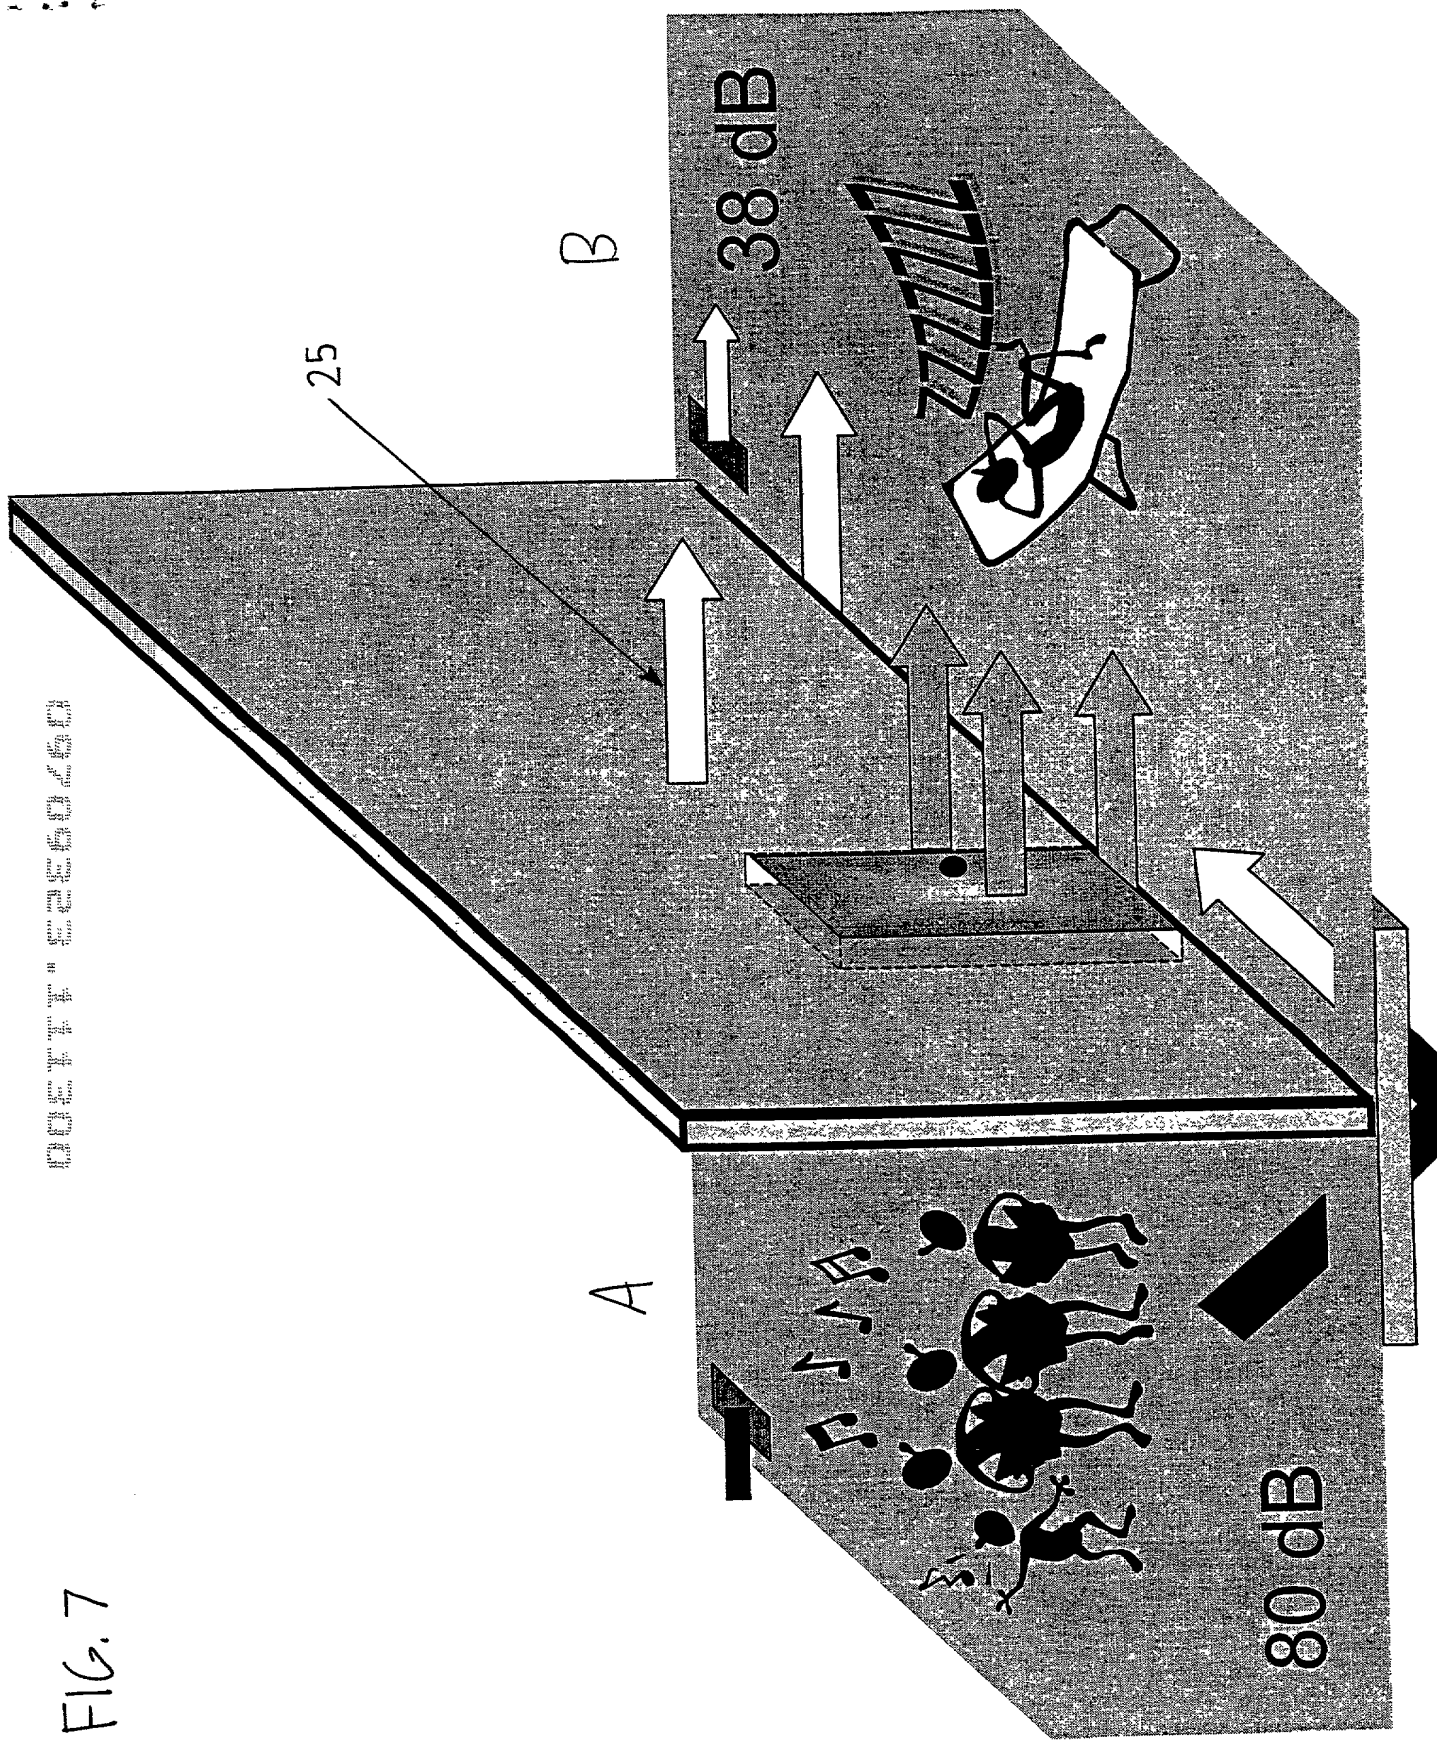

**COMBINED DECLARATION AND POWER OF ATTORNEY
FOR UTILITY PATENT APPLICATION**

Attorney's Docket No.

032264-054

As a below-named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;

I BELIEVE I AM THE ORIGINAL, FIRST AND SOLE INVENTOR (if only one name is listed below) OR AN ORIGINAL, FIRST AND JOINT INVENTOR (if more than one name is listed below) OF THE SUBJECT MATTER WHICH IS CLAIMED AND FOR WHICH A PATENT IS SOUGHT ON THE INVENTION ENTITLED:

SOUND CONTROL METHOD

the specification of which

(check one)



is attached hereto;



was filed on _____ as

Application No. _____

and was amended on _____;
(if applicable)

I HAVE REVIEWED AND UNDERSTAND THE CONTENTS OF THE ABOVE-IDENTIFIED SPECIFICATION, INCLUDING THE CLAIMS, AS AMENDED BY ANY AMENDMENT REFERRED TO ABOVE;

I ACKNOWLEDGE THE DUTY TO DISCLOSE TO THE OFFICE ALL INFORMATION KNOWN TO ME TO BE MATERIAL TO PATENTABILITY AS DEFINED IN TITLE 37, CODE OF FEDERAL REGULATIONS, Sec. 1.56 (as amended effective March 16, 1992);

I do not know and do not believe the said invention was ever known or used in the United States of America before my or our invention thereof, or patented or described in any printed publication in any country before my or our invention thereof or more than one year prior to said application; that said invention was not in public use or on sale in the United States of America more than one year prior to said application; that said invention has not been patented or made the subject of an inventor's certificate issued before the date of said application in any country foreign to the United States of America on any application filed by me or my legal representatives or assigns more than twelve months prior to said application;

I hereby claim foreign priority benefits under Title 35, United States Code Sec. 119 and/or Sec. 365 of any foreign application(s) for patent or inventor's certificate as indicated below and have also identified below any foreign application for patent or inventor's certificate on this invention having a filing date before that of the application(s) on which priority is claimed:

COMBINED DECLARATION AND POWER OF ATTORNEY

Attorney's Docket No.

032264-054

COUNTRY/INTERNATIONAL	APPLICATION NUMBER	DATE OF FILING (day, month, year)	PRIORITY CLAIMED
			YES_ NO_
			YES_ NO_

I hereby appoint the following attorneys and agent(s) to prosecute said application and to transact all business in the Patent and Trademark Office connected therewith and to file, prosecute and to transact all business in connection with international applications directed to said invention:

William L. Mathis	17,337	R. Danny Huntington	27,903	Gerald F. Swiss	30,113
Robert S. Swecker	19,885	Eric H. Weisblatt	30,505	Charles F. Wieland III	33,096
Platon N. Mandros	22,124	James W. Peterson	26,057	Bruce T. Wieder	33,815
Benton S. Duffett, Jr.	22,030	Teresa Stanek Rea	30,427	Todd R. Walters	34,040
Norman H. Stepno	22,716	Robert E. Krebs	25,885	Ronni S. Jillions	31,979
Ronald L. Grudziecki	24,970	William C. Rowland	30,888	Harold R. Brown III	36,341
Frederick G. Michaud, Jr.	26,003	T. Gene Dillahunt	25,423	Allen R. Baum	36,086
Alan E. Kopecki	25,813	Patrick C. Keane	32,858	Steven M. duBois	35,023
Regis E. Slutter	26,999	B. Jefferson Boggs, Jr.	32,344	Brian P. O'Shaughnessy	32,747
Samuel C. Miller, III	27,360	William H. Benz	25,952	Kenneth B. Leffler	36,075
Robert G. Mukai	28,531	Peter K. Skiff	31,917	Fred W. Hathaway	32,236
George A. Hovanec, Jr.	28,223	Richard J. McGrath	29,195		
James A. LaBarre	28,632	Matthew L. Schneider	32,814		
E. Joseph Gess	28,510	Michael G. Savage	32,596		



21839

and:

Address all correspondence to:



21839

E. Joseph Gess
BURNS, DOANE, SWECKER & MATHIS, L.L.P.
P.O. Box 1404
Alexandria, Virginia 22313-1404

Address all telephone calls to: _____ at (703) 836-6620.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

FULL NAME OF SOLE OR FIRST INVENTOR	SIGNATURE	DATE
R. Michael Fay		
RESIDENCE	CITIZENSHIP	
2249 S. Hoyt Ct., Lakewood, Jefferson, CO, 80227	U.S.A.	
POST OFFICE ADDRESS		
Technical Center, 10100 W Ute Avenue, Littleton, CO 80127		
FULL NAME OF SECOND JOINT INVENTOR, IF ANY	SIGNATURE	DATE
Lawrence J. Gelin		
RESIDENCE	CITIZENSHIP	
6584 S. Newland Circle, Littleton, CO 80123	U.S.A.	
POST OFFICE ADDRESS		
Technical Center, 10100 W Ute Avenue, Littleton, CO 80127		

COMBINED DECLARATION AND POWER OF ATTORNEY FOR UTILITY PATENT APPLICATION Supplemental Sheet	Attorney's Docket No. 032264-054
---	---

FULL NAME OF THIRD JOINT INVENTOR, IF ANY	SIGNATURE	DATE
Francis J. Babineau, Jr.		
RESIDENCE	CITIZENSHIP	
20110 Williamson Drive, Parker, Douglas, CO 80138	U.S.A.	
POST OFFICE ADDRESS		
Technical Center, 10100 W Ute Avenue, Littleton, CO 80127		
FULL NAME OF FOURTH JOINT INVENTOR, IF ANY	SIGNATURE	DATE
Brandon Dillan Tinianov		
RESIDENCE	CITIZENSHIP	
5864 S. Huron Street, Littleton, CO 80120	U.S.A.	
POST OFFICE ADDRESS		
Technical Center, 10100 W Ute Avenue, Littleton, CO 80127		

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149